

RefNet: A Reference-aware Network for Background Based Conversation

Chuan Meng

Shandong University
Qingdao, China

mengchuan@mail.sdu.edu.cn

Pengjie Ren

University of Amsterdam
Amsterdam, The Netherlands

p.ren@uva.nl

Zhumin Chen

Shandong University
Qingdao, China

chenzhumin@sdu.edu.cn

Christof Monz

University of Amsterdam
Amsterdam, The Netherlands

c.monz@uva.nl

Jun Ma

Shandong University
Qingdao, China

majun@sdu.edu.cn

Maarten de Rijke

University of Amsterdam
Amsterdam, The Netherlands

derijke@uva.nl

Abstract

Existing conversational systems tend to generate generic responses. Recently, Background Based Conversations (BBCs) have been introduced to address this issue. Here, the generated responses are grounded in some background information. The proposed methods for BBCs are able to generate more informative responses, however, they either cannot generate natural responses or have difficulties in locating the right background information. In this paper, we propose a Reference-aware Network (RefNet) to address both issues. Unlike existing methods that generate responses token by token, RefNet incorporates a novel *reference decoder* that provides an alternative way to learn to directly select a *semantic unit* (e.g., a span containing complete semantic information) from the background. Experimental results show that RefNet significantly outperforms state-of-the-art methods in terms of both automatic and human evaluations, indicating that RefNet can generate more appropriate and human-like responses.

1 Introduction

Dialogue systems have attracted a lot of attention recently (Vinyals and Le, 2015; Shang et al., 2015; Sordani et al., 2015; Serban et al., 2016; Gu et al., 2016). Sequence-to-sequence models (Sutskever et al., 2014) are an effective framework that is commonly adopted in existing studies. However, a problem of sequence-to-sequence based methods is that they tend to generate generic and non-informative responses which provide deficient information (Chen et al., 2017; Jiang et al., 2019).

Previous research has proposed various methods to alleviate the issue, such as adjusting objective functions (Li et al., 2016), incorporating external information, such as latent topic (Xing et al., 2017), personal profiles (Zhang et al., 2018b), and knowledge (Zhu et al., 2017; Parthasarathi

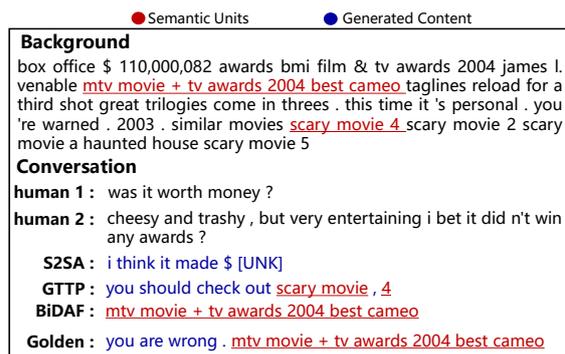


Figure 1: Background Based Conversation (BBC).

and Pineau, 2018), etc. Recently, Background Based Conversations (BBCs) have been proposed for generating more informative responses that are grounded in some background information (Zhou et al., 2018b; Moghe et al., 2018). As shown in Fig. 1, unlike previous conversational settings (Vinyals and Le, 2015; Serban et al., 2016; Ke et al., 2018), in a BBC background material (e.g., a plot or review about a movie) is supplied to promote topic-specific conversations.

Existing methods for BBCs can be grouped into two categories, *generation-based* methods (e.g., GTTP (See et al., 2017)) and *extraction-based* methods (e.g., BiDAF (Seo et al., 2016)). Generation-based methods generate the response token by token, so they can generate natural and fluent responses, generally. However, generation-based methods suffer from two issues. First, they are relatively ineffective in leveraging background information. For example, for the case in Fig. 1, S2SA does not leverage background information at all. Second, they have difficulties locating the right semantic units in the background information. Here, a *semantic unit* is a span from the background information that expresses complete semantic meaning. For example, in Fig. 1, the background contains many semantic units, e.g., “*mtv movie + tv awards 2004 best cameo*” and “*scary*

movie 4.” GTTP uses the wrong semantic unit “scary movie 4” to answer the question by “human 2.” Moreover, because generation-based methods generate the response one token at a time, they risk breaking a complete semantic unit, e.g., “scary movie 4” is split by a comma in the response of GTTP in Fig. 1. The reason is that generation-based methods lack a global perspective, i.e., each decoding step only focuses on a single (current) token and does not consider the tokens to be generated in the following steps. Extraction-based methods extract a span from the background as their response and are relatively good at locating the right semantic unit. But because of their extractive nature, they cannot generate natural conversational responses, see, e.g., the response of BiDAF in Fig. 1.

We propose a **Reference-aware Network** (RefNet) to address above issues. RefNet consists of four modules: a *background encoder*, a *context encoder*, a *decoding switcher*, and a *hybrid decoder*. The background encoder and context encoder encode the background and conversational context into representations, respectively. Then, at each decoding step, the decoding switcher decides between *reference decoding* and *generation decoding*. Based on the decision made by the decoding switcher, the hybrid decoder either selects a semantic unit from the background (*reference decoding*) or generates a token otherwise (*generation decoding*). In the latter case, the decoding switcher further determines whether the hybrid decoder should predict a token from the vocabulary or copy one from the background. Besides generating the response token by token, RefNet also provides an alternative way to learn to select a semantic unit from the background directly. Experiments on a BBC dataset show that RefNet significantly outperforms state-of-the-art methods in terms of both automatic and, especially, human evaluations.

Our contributions are as follows:

- We propose a novel architecture, RefNet, for BBCs that can generate more informative and appropriate responses while retaining fluency.
- We devise a decoding switcher and a hybrid decoder to adaptively coordinate between *reference decoding* and *generation decoding*.
- Experiments show that RefNet outperforms state-of-the-art models by a large margin in terms of both automatic and human evaluations.

2 Related work

We survey two types of related work on BBCs: generation-based and extraction-based methods.

2.1 Generation-based methods

Most effective generation-based models are based on sequence-to-sequence modeling (Sutskever et al., 2014) and an attention mechanism (Bahdanau et al., 2015). The proposed methods have achieved promising results on different conversational tasks (Vinyals and Le, 2015; Shang et al., 2015; Serban et al., 2016, 2017; Lowe et al., 2015). Many challenges remain, e.g., response diversity (Li et al., 2016; Zhao et al., 2017), response controllability (Ke et al., 2018; Zhang et al., 2018a), and response informativeness, which may be one of the most important issues. Various methods have been proposed to improve response informativeness (Zhang et al., 2018c), such as adjusting objective functions (Li et al., 2016), incorporating latent topic information (Xing et al., 2017), leveraging outside knowledge bases (He et al., 2017; Zhu et al., 2017; Liu et al., 2018; Zhou et al., 2018a) and knowledge representation (Ghazvininejad et al., 2018; Lian et al., 2019; Vougiouklis et al., 2016), etc. Recently, Background Based Conversations (BBCs) have been proposed for generating more informative responses by exploring related background information (Zhou et al., 2018b; Dinan et al., 2019). Moghe et al. (2018) build a dataset for BBC and conduct experiments with state-of-the-art generation-based methods. They show that generation-based methods can generate fluent, natural responses, but have difficulty in locating the right background information. Liu et al. (2019b) propose an augmented knowledge graph based chatting model via transforming background information into knowledge graph. However, it needs lot of manual labor to build such knowledge graph.¹ Differently, we directly leverage raw background information to model BBC.

2.2 Extraction-based methods

Extraction-based methods have originally been proposed for Reading Comprehension (RC) tasks (Rajpurkar et al., 2016), where each question can be answered by a right span in a given passage.

¹Their paper is just online recently and their knowledge graph is not publicly available yet, so we did not compare with them in this work.

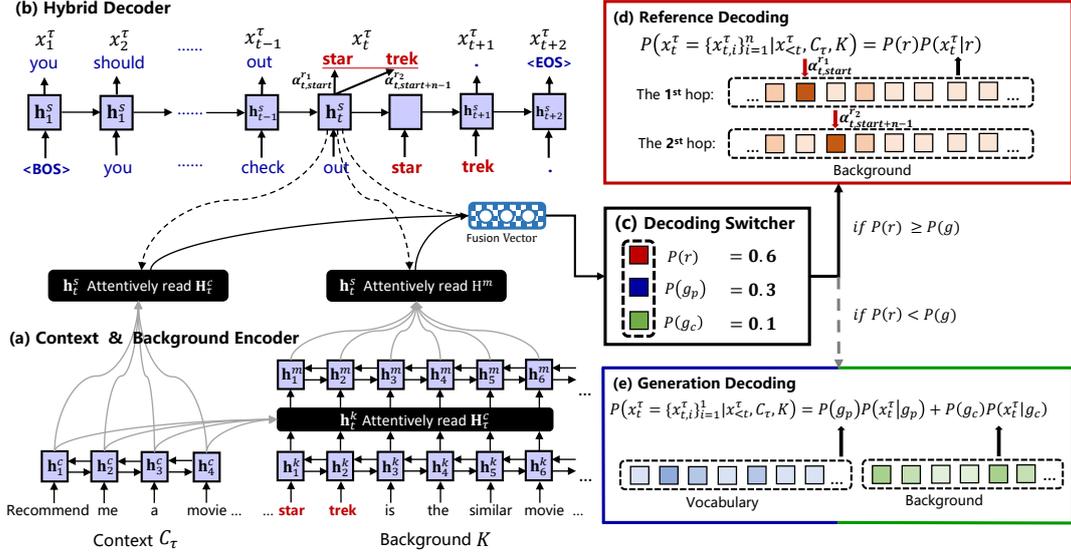


Figure 2: Overview of RefNet.

Wang and Jiang (2017) combine match-LSTM and a pointer network (Vinyals et al., 2015) to predict the boundary of the answer. Seo et al. (2016) propose BiDAF, which uses a variant co-attention architecture (Xiong et al., 2017) to enhance the extraction result. Wang et al. (2017) propose R-net, which introduces a self-matching mechanism. Wang et al. (2018) introduce multi-granularity hierarchical attention. For BBCs, Moghe et al. (2018) show that extraction-based methods are better at locating the right background information than generation-based methods. However, current extraction-based methods are specifically designed for RC tasks. They are not suitable for BBCs for two reasons: First, BBCs usually do not have standard factoid questions like those in RC tasks. Second, BBCs require that the responses are fluent and conversational.

Unlike the work summarized above, we propose an end-to-end neural model for BBCs, RefNet, that combines the advantages of generation-based methods and extraction-based methods while avoiding their shortcomings. The main challenge that RefNet addresses is how to design an effective neural architecture that is able to refer to the right background information at the right time in the right place of a conversation while minimizing the influence on response fluency.

3 RefNet

Given a background in the form of free text $K = (k_1, k_2, \dots, k_t, \dots, k_{L_K})$ with L_K tokens and a current conversational context $C_\tau = (\dots, X_{\tau-3},$

$X_{\tau-2}, X_{\tau-1})$, the task of BBC is to generate a response X_τ at τ . Each X_τ contains a sequence of L_{X_τ} units, i.e., $X_\tau = (x_1^\tau, x_2^\tau, \dots, x_t^\tau, \dots, x_{L_{X_\tau}}^\tau)$, where x_t^τ , the unit at timestamp t , could be a token $\{x_{t,i}^\tau\}_{i=1}^1$ or a semantic unit $\{x_{t,i}^\tau\}_{i=1}^n$ containing n tokens.

RefNet consists of four modules: background encoder, context encoder, decoding switcher, and hybrid decoder; see Fig. 2. Background and context encoders encode the given background K and context C_τ into latent representations \mathbf{H}^k and \mathbf{H}_τ^c , respectively. \mathbf{H}^k and \mathbf{H}_τ^c go through a matching layer to get a context-aware background representation \mathbf{H}^m . At each decoding step, the decoding switcher predicts the probabilities of executing the *reference decoding* or *generation decoding*. The hybrid decoder takes \mathbf{H}_τ^c , \mathbf{H}^m and the embedding of the previous token as input and computes the probability of selecting a semantic unit from the background (*reference decoding*) or generating a token (*generation decoding*) based on the decision made by the decoding switcher. Next, we introduce the separate modules.

3.1 Background and context encoders

We use a bi-directional RNN (Schuster and Paliwal, 1997) with LSTM (Hochreiter and Schmidhuber, 1997) to convert the context and background sequences into two hidden state sequences $\mathbf{H}_\tau^c = (\mathbf{h}_1^c, \mathbf{h}_2^c, \dots, \mathbf{h}_{L_{C_\tau}}^c)$ and $\mathbf{H}^k = (\mathbf{h}_1^k, \mathbf{h}_2^k, \dots, \mathbf{h}_{L_K}^k)$, respectively:

$$\begin{aligned} \mathbf{h}_t^c, \mathbf{c}_t^c &= \text{BiLSTM}_c((\mathbf{h}_{t-1}^c, \mathbf{c}_{t-1}^c), \mathbf{e}(x_t)) \\ \mathbf{h}_t^k, \mathbf{c}_t^k &= \text{BiLSTM}_k((\mathbf{h}_{t-1}^k, \mathbf{c}_{t-1}^k), \mathbf{e}(k_t)), \end{aligned} \quad (1)$$

where \mathbf{h}_t^c or \mathbf{h}_t^k correspond to a token in the context or background, respectively, and $\mathbf{e}(x_t)$ and $\mathbf{e}(k_t)$ are the embedding vectors, respectively. We concatenate the responses in the context, L_{C_τ} is the number of all tokens in the context, and we do not consider the segmentation of semantic units during encoding, i.e., each x_t^τ is a token $\{x_{t,i}^\tau\}_{i=1}^1$.

Further, we use a matching layer (Wang and Jiang, 2017; Wang et al., 2017) to get the context-aware background representation $\mathbf{H}^m = (\mathbf{h}_1^m, \mathbf{h}_2^m, \dots, \mathbf{h}_{L_K}^m)$:

$$\mathbf{h}_t^m, \mathbf{c}_t^m = \text{BiLSTM}_m((\mathbf{h}_{t-1}^m, \mathbf{c}_{t-1}^m), [\mathbf{h}_t^k, \mathbf{z}_t^{kc}]), \quad (2)$$

where \mathbf{z}_t^{kc} is calculated using an attention mechanism (Bahdanau et al., 2015) with \mathbf{h}_t^k attentively reading \mathbf{H}_τ^c :

$$s_{t,j}^{kc} = \mathbf{v}_{kc}^\top \tanh(\mathbf{W}_{kc} \mathbf{h}_j^c + \mathbf{U}_{kc} \mathbf{h}_t^k + \mathbf{b}_{kc})$$

$$\alpha_{t,i}^{kc} = \frac{\exp(s_{t,i}^{kc})}{\sum_{j=1}^{L_{C_\tau}} \exp(s_{t,j}^{kc})}, \quad \mathbf{z}_t^{kc} = \sum_{i=1}^{L_{C_\tau}} \alpha_{t,i}^{kc} \mathbf{h}_i^c, \quad (3)$$

where \mathbf{W}_{kc} , \mathbf{U}_{kc} , \mathbf{v}_{kc} and \mathbf{b}_{kc} are parameters.

3.2 Hybrid decoder

During training, we know that the next x_t^τ to be generated is a token $\{x_{t,i}^\tau\}_{i=1}^1$ or a semantic unit $\{x_{t,i}^\tau\}_{i=1}^n$. If $x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^n$, then x_t^τ is generated in *reference decoding* mode with the probability modeled as follows:

$$P(x_t^\tau | x_{<t}^\tau, C_\tau, K) = P(r)P(x_t^\tau | r), \quad (4)$$

where $P(r)$ is the *reference decoding* probability (see §3.3); $P(x_t^\tau | r)$ is the probability of generating x_t^τ under the *reference decoding* r (see §3.2.1). If $x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^1$, then x_t^τ is generated in *generation decoding* mode with the probability modeled as:

$$P(x_t^\tau | x_{<t}^\tau, C_\tau, K) = P(g_p)P(x_t^\tau | g_p) + P(g_c)P(x_t^\tau | g_c), \quad (5)$$

where $P(g) = P(g_p) + P(g_c)$ is the *generation decoding* probability; $P(g_p)$ is the *predicting generation decoding* probability (see §3.3) and $P(g_c)$ is the *copying generation decoding* probability (see §3.3). $P(x_t^\tau | g_p)$ and $P(x_t^\tau | g_c)$ are the probabilities of generating x_t^τ under g_p and g_c , respectively (see §3.2.2).

3.2.1 Reference decoding

Within *reference decoding*, the probability of generating the semantic unit $\{x_{t,i}^\tau\}_{i=1}^n$ is evaluated as

follows:

$$P(x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^n | r) = \alpha_{t,start}^{r_1} \alpha_{t,start+n-1}^{r_2}, \quad (6)$$

where $\alpha_{t,start}^{r_1}$ and $\alpha_{t,start+n-1}^{r_2}$ are the probabilities of the start and end tokens of $\{x_{t,i}^\tau\}_{i=1}^n$ (from the background), respectively, which are estimated by two-hop pointers with respect to the context-aware background hidden state sequence \mathbf{H}^m . The $\alpha_{t,start}^{r_1}$ is calculated by the first hop pointer, as shown in Eq. 7:

$$\mathbf{o}_t^1 = \mathbf{W}_{o_1} [\mathbf{h}_t^s; \mathbf{z}_t^{sc}; \mathbf{z}_t^{sm}] + \mathbf{b}_{o_1}$$

$$s_{t,j}^{r_1} = \mathbf{v}_r^\top \tanh(\mathbf{W}_r \mathbf{h}_j^m + \mathbf{U}_r \mathbf{o}_t^1 + \mathbf{b}_r)$$

$$\alpha_{t,start}^{r_1} = \frac{\exp(s_{t,start}^{r_1})}{\sum_{j=1}^{L_K} \exp(s_{t,j}^{r_1})}, \quad (7)$$

where \mathbf{W}_{o_1} , \mathbf{W}_r , \mathbf{U}_r , \mathbf{v}_r , \mathbf{b}_{o_1} and \mathbf{b}_r are parameters. \mathbf{h}_t^s is the decoding hidden state vector, the updating scheme of which will be detailed in §3.4. \mathbf{z}_t^{sc} and \mathbf{z}_t^{sm} are calculated in a similar way like Eq. 3 with \mathbf{h}_t^s attentively reading \mathbf{H}_τ^c and \mathbf{H}^m , respectively. The $\alpha_{t,start+n-1}^{r_2}$ is calculated by the second hop pointer, as shown in Eq. 8:

$$\mathbf{z}_t^r = \sum_{i=1}^{L_K} \alpha_{t,i}^{r_1} \mathbf{h}_i^m, \quad \mathbf{o}_t^2 = \mathbf{W}_{o_2} [\mathbf{o}_t^1; \mathbf{z}_t^r] + \mathbf{b}_{o_2}$$

$$s_{t,j}^{r_2} = \mathbf{v}_r^\top \tanh(\mathbf{W}_r \mathbf{h}_j^m + \mathbf{U}_r \mathbf{o}_t^2 + \mathbf{b}_r)$$

$$\alpha_{t,start+n-1}^{r_2} = \frac{\exp(s_{t,start+n-1}^{r_2})}{\sum_{j=1}^{L_K} \exp(s_{t,j}^{r_2})}, \quad (8)$$

where \mathbf{W}_{o_2} and \mathbf{b}_{o_2} are parameters. *Reference decoding* adopts soft pointers $\alpha_{t,start}^{r_1}$ and $\alpha_{t,start+n-1}^{r_2}$ to select semantic units, so it will not influence the automatic differentiation during training.

3.2.2 Generation decoding

Within *predicting generation decoding*, the probability of predicting the token x_t^τ from the vocabulary is estimated as follows:

$$P(x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^1 | g_p) = \text{softmax}(\mathbf{W}_{g_p} \mathbf{o}_t^1 + \mathbf{b}_{g_p}), \quad (9)$$

where \mathbf{W}_{g_p} and \mathbf{b}_{g_p} are parameters and the vector \mathbf{o}_t^1 is the same one as in Eq. 7.

Within *copying generation decoding*, the probability of copying the token x_t^τ from the background is estimated as follows:

$$P(x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^1 | g_c) = \sum_{i:k_i=x_t^\tau} \alpha_{t,i}^{sm}, \quad (10)$$

where $\alpha_{t,i}^{sm}$ is the attention probability distribution on \mathbf{H}^m produced by the same attention process with \mathbf{z}_t^{sm} in Eq. 7.

3.3 Decoding switcher

The decoding switching probabilities $P(r)$, $P(g_p)$ and $P(g_c)$ are estimated as follows:

$$[P(r), P(g_p), P(g_c)] = \text{softmax}(\mathbf{f}_t), \quad (11)$$

where \mathbf{f}_t is a fusion vector, which is computed through a linear transformation in Eq. 12:

$$\mathbf{f}_t = \mathbf{W}_f[\mathbf{h}_t^s; \mathbf{c}_t^s; \mathbf{z}_t^{sc}; \mathbf{z}_t^{sm}] + \mathbf{b}_f, \quad (12)$$

where \mathbf{W}_f and \mathbf{b}_f are parameters. \mathbf{h}_t^s and \mathbf{c}_t^s are decoding states (see §3.4).

During testing, at each decoding step, we first compute $P(r)$ and $P(g) = P(g_p) + P(g_c)$. If $P(r) \geq P(g)$, we use Eq. 4 to generate a semantic unit, otherwise we use Eq. 5 to generate a token.

3.4 State updating

The decoding state updating depends on whether the generated unit is a token or semantic unit. If x_{t-1}^τ is a token, then $(\mathbf{h}_t^s, \mathbf{c}_t^s) =$

$$\text{LSTM}((\mathbf{h}_{t-1}^s, \mathbf{c}_{t-1}^s), [e(x_{t-1}^\tau); \mathbf{z}_{t-1}^{sc}; \mathbf{z}_{t-1}^{sm}]). \quad (13)$$

If x_{t-1}^τ is a span, then for each token in it, we update state with Eq. 13 and choose the last state.

The decoding states are initialized using a linear layer with the last state of \mathbf{H}^m and \mathbf{H}^c as input:

$$\begin{aligned} \mathbf{h}_0^s &= \text{relu}(\mathbf{W}_{hs}[\mathbf{h}_{LK}^m; \mathbf{h}_{LC_\tau}^c] + \mathbf{b}_{hs}) \\ \mathbf{c}_0^s &= \text{relu}(\mathbf{W}_{cs}[\mathbf{c}_{LK}^m; \mathbf{c}_{LC_\tau}^c] + \mathbf{b}_{cs}), \end{aligned} \quad (14)$$

where \mathbf{W}_{hs} , \mathbf{W}_{cs} , \mathbf{b}_{hs} and \mathbf{b}_{cs} are parameters. relu is the relu activation function.

3.5 Training

Our goal is to maximize the prediction probability of the target response given the context and background. We have three objectives, namely generation loss, reference loss and switcher loss.

The *generation loss* is defined as $\mathcal{L}_g(\theta) =$

$$-\frac{1}{M} \sum_{\tau=1}^M \sum_{t=1}^{L_{X_\tau}} \log[P(x_t^\tau | x_{<t}^\tau, C_\tau, K)], \quad (15)$$

where θ are all the parameters of RefNet. M is the number of all training samples given a background K . In $\mathcal{L}_g(\theta)$, each x_t^τ is a token $\{x_{t,i}^\tau\}_{i=1}^1$.

The *reference loss* is defined as $\mathcal{L}_r(\theta) =$

$$-\frac{1}{M} \sum_{\tau=1}^M \sum_{t=1}^{L_{X_\tau}} I(x_t^\tau) \cdot \log[P(x_t^\tau | x_{<t}^\tau, C_\tau, K)], \quad (16)$$

where $I(x_t^\tau)$ is an indicator function that equals 1

if $x_t^\tau = \{x_{t,i}^\tau\}_{i=1}^n$ and 0 otherwise.

RefNet introduces a decoding switcher to decide between *reference decoding* and *generation decoding*. To better supervise this process we define *switcher loss* $\mathcal{L}_s(\theta) =$

$$-\frac{1}{M} \sum_{\tau=1}^M \sum_{t=1}^{L_{X_\tau}} I(x_t^\tau) \log[P(r)] + (1 - I(x_t^\tau)) \log[P(g)], \quad (17)$$

where $I(x_t^\tau)$ is also an indicator function, which is the same as in $\mathcal{L}_r(\theta)$.

The *final loss* is a linear combination of the three loss functions just defined:

$$\mathcal{L}(\theta) = \mathcal{L}_g(\theta) + \mathcal{L}_r(\theta) + \mathcal{L}_s(\theta). \quad (18)$$

All parameters of RefNet as well as word embeddings are learned in an end-to-end back-propagation training paradigm.

4 Experimental Setup

4.1 Implementation details

We set the word embedding size and LSTM hidden state size to 128 and 256, respectively. The vocabulary size is limited to 25,000. For fair comparison, all models use the same embedding size, hidden state size and vocabulary size. Following Moghe et al. (2018), we limit the context length of all models to 65. We train all models for 30 epochs and test on a validation set after each epoch, and select the best model based on the validation results according to BLEU metric. We use gradient clipping with a maximum gradient norm of 2. We use the Adam optimizer with a mini-batch size of 16. The learning rate is 0.001. We test the model performance on the validation set for every epoch.

4.2 Dataset

Recently, some datasets for BBCs have been released (Zhou et al., 2018b; Dinan et al., 2019). We choose the Holl-E dataset released by Moghe et al. (2018) because it contains boundary annotations of the background information used for each response. We did not use the other datasets because they do not have such annotations for training RefNet. Holl-E is built for movie chats in which each response is explicitly generated by copying and/or modifying sentences from the background. The background consists of plots, comments and reviews about movies collected from different websites. There are three versions according to

the background: oracle background (256 words), mixed-short background (256 words) and mixed-long background (1200 words). There are also two versions of the test set: one with single golden reference (SR) and the other with multiple golden references (MR); see Moghe et al. (2018).

4.3 Baselines

We choose all baselines we can get on this task as in Moghe et al. (2018), which are divided into two groups.

- Generation-based methods. **S2S** maps the context to the response with an encoder-decoder framework (Sutskever et al., 2014; Shang et al., 2015). **HRED** encodes the context of the conversation with two hierarchical levels (Serban et al., 2016). S2S and HRED do not use any background information. **S2SA** adds an attention mechanism to the original S2S model to attend to the relevant background information (Bahdanau et al., 2015). **GTTP** leverages background information with a copying mechanism to copy a token from the background at the appropriate decoding step (See et al., 2017). We used the code² released by Moghe et al. (2018) for above models.
- Extraction-based methods. **BiDAF**³ extracts a span from background as response and uses a co-attention architecture to improve the span finding accuracy (Seo et al., 2016).

We believe BiDAF is already a very strong and representative extraction-based model (Liu et al., 2019a) used in this task (Moghe et al., 2018). It’s noted that even with a stronger extraction-based model, we will arrive at a similar conclusion due to the nature of extraction-based models that cannot generate natural and fluent responses. In addition to this, the newer and more sophisticated mechanisms used in stronger extraction-based models can be added into RefNet to boost *reference decoding*. However, our core contribution is a novel framework that combines the advantages of generation-based and extraction-based models rather than improving an extraction-based model.

²<https://github.com/nikitacs16/Holl-E>

³For fair comparison, we use two different settings from Moghe et al. (2018) for BiDAF. First, we do not use pre-trained GloVe such that all models randomly initialize the word embedding with the same vocabulary size. Second, to keep consistent with the other methods, we use the response as the reference instead of the groundtruth span from background.

4.4 Evaluation metrics

Following the work of Moghe et al. (2018), we use BLEU-4 (Papineni et al., 2002), ROUGE-1, ROUGE-2 and ROUGE-L (Lin, 2004) as automatic evaluation metrics. For BiDAF and RefNet, we further report F1 (Seo et al., 2016). We also randomly sample 500 test samples to conduct human evaluations using Amazon Mechanical Turk. For each sample, we ask 3 workers to annotate whether the response is good in terms of four aspects: (1) *Naturalness* (**N**), i.e., whether the responses are conversational, natural and fluent; (2) *Informativeness* (**I**)⁴, i.e., whether the responses use some background information; (3) *Appropriateness* (**A**), i.e., whether the responses are appropriate/relevant to the given context; and (3) *Humanness* (**H**), i.e., whether the responses look like they are written by a human.

5 Results

5.1 Automatic evaluation

Because of the constraints of specific topics imposed by the background material (Dinan et al., 2019), automatic evaluation on BBCs is more reliable than usual in response generation. We list the results of all methods for different background settings (oracle background, mixed-short background and mixed-long background) in Table 1.

First, RefNet outperforms all generation-based methods by a large margin on all metrics. Especially, RefNet outperforms the strong baseline GTTP by more than 10% for almost all metrics. The improvements show that RefNet is much better at leveraging and locating the right background information to improve the responses than these generation-based methods.

Second, RefNet outperforms the extraction-based method BiDAF in most cases, especially on the oracle background. We think the reason is that BiDAF can only rigidly extract the relevant spans from the background, which does not consider the conversational characteristics of responses. We believe no matter how strong an extraction-based one is, it will still face this inherent problem. Differently, RefNet also benefits from the *generation decoding* to generate natural conversational words

⁴Unlike Moghe et al. (2018), we do not consider specificity, because we find it is hard to define what is movie-specific information. Instead, we add *Informativeness* to evaluate whether the model tends to use background information.

Table 1: Automatic evaluation results.

Methods	F1		BLEU		ROUGE-1		ROUGE-2		ROUGE-L	
	SR	MR								
no background										
S2S	-	-	5.26	7.11	27.15	30.91	9.56	11.85	21.48	24.81
HRED	-	-	5.23	5.38	24.55	25.38	7.61	8.35	18.87	19.67
oracle background (256 words)										
S2SA	-	-	12.34	13.62	27.97	32.65	14.50	18.22	23.23	27.55
GTTP	-	-	14.35	18.01	29.82	35.08	17.33	22.00	25.08	30.06
BiDAF	37.12	44.41	24.93	32.21	35.60	42.40	29.48	36.54	31.72	38.39
RefNet	40.18*	48.81*	27.00*	33.65*	42.87*	49.64*	30.73*	38.15*	37.11*	43.77*
mixed-short background (256 words)										
S2SA	-	-	11.71	12.76	26.36	30.76	13.36	16.69	21.96	25.99
GTTP	-	-	13.65	19.49	30.77	36.06	18.72	23.70	25.67	30.69
BiDAF	40.38	45.86	27.44	33.40	38.79	43.93	32.91	39.50	35.09	40.12
RefNet	40.49*	47.25*	29.38*	34.83*	41.33*	47.00*	31.08	36.50	36.17*	41.72*
mixed-long background (1200 words)										
S2SA	-	-	3.84	3.92	21.90	24.90	5.63	7.00	17.02	19.65
GTTP	-	-	8.28	10.28	23.64	28.81	10.11	14.34	17.60	22.04
RefNet	31.97	40.83	17.19*	26.22*	34.90*	42.08*	22.12*	29.74*	29.64*	36.65*

Bold face indicates leading results in terms of the corresponding metric. Significant improvements over the best baseline results are marked with * (t-test, $p < 0.05$). SR and MR refer to test sets with single and multiple references. We cannot run BiDAF on the 1200-word background due to out of memory errors even with very small batch sizes.

in responses, which makes up the shortcoming of only extraction.

Third, RefNet is more robust with respect to the length of the background than the other methods. Especially, S2SA can achieve acceptable results on the oracle and mixed-short backgrounds but its performance drops sharply when applied to a very long mixed-long background. In contrast, RefNet still has superior results.

5.2 Human evaluation

In order to verify the effectiveness of RefNet more thoroughly, we conduct a human evaluation for RefNet, the best generation-based baseline, GTTP, and the extraction-based baseline BiDAF. The results are shown in Table 2. Generally, RefNet achieves the best performance in terms of all metrics. In particular, we find that RefNet is even better than GTTP in terms of *Naturalness* and *Humanness*. We believe this is because RefNet can coordinate between *reference decoding* and *generation decoding*, where the generated conversational words and the selected semantic units are synthesized in a natural and appropriate way.

RefNet is also much better than GTTP in terms of *Appropriateness* and *Informativeness*, which shows that RefNet is better at locating the appropriate semantic units. The reason is that with the ability to generate a full semantic unit at

Table 2: Human evaluation results on mixed-short background version.

	GTTP		BiDAF		RefNet	
	≥ 1	≥ 2	≥ 1	≥ 2	≥ 1	≥ 2
(N)	404	209	395	183	438	248
(I)	379	180	400	206	417	212
(A)	399	169	411	195	425	219
(H)	419	233	381	152	444	299

$\geq n$ means that at least n MTurk workers think it is a good response w.r.t. *Naturalness* (N), *Informativeness* (I), *Appropriateness* (A) and *Humanness* (H).

once, RefNet has a global perspective to locate the appropriate semantic units, reducing the risk of breaking a complete semantic unit. BiDAF achieves good evaluation scores on *Informativeness* and *Appropriateness*, but gets the worst scores on *Naturalness* and *Humanness*. Although BiDAF is relatively good at locating the relevant semantic unit, its responses lack contextual explanations, which makes them hard to understand. This further shows that only extracting a span from the background is far from enough for BBCs, even replacing BiDAF with a newer and stronger extraction-based one.

6 Analysis

6.1 Reference vs. generation decoding

To analyze the effectiveness of reference and generation decoding, we compare the results of

Table 3: Case study.

Example 1	Example 2
<p>Background: ... that 's redundant because it is a ben stiller movie . clearly my expectations for this movie were not high and , maybe because of that , i found " meet the fockers " quite funny . do you remember when big box office \$ 279,167,575 awards ascap film and television music awards 2005 top box office ...</p>	<p>Background: ...being captured by boris and onatopp . bond arrives in st . petersburg and meets his cia contact , jack wade (joe don baker) . wade agrees to take bond to the hideout of a russian gangster , valentin zukovsky (robbie coltrane) , whom bond had shot in the leg and given a permanent limp years before ...</p>
<p>H1: what did you think about the title ? H2: the title pretty much describes the level of the humor in this ben stiller comedy . H1: haha , i agree ! do you know if it made any money ?</p>	<p>H1: that was a good seen . H2: what did you like about the movie ? H1: i liked his friend , jack wade .</p>
S2SA yeah , it won the family and television music awards , golden UNK comedy .	my favorite scene is when carl comes to take bond to the docks of a black diner and UNK .
GTTP clearly my expectations for this movie for everyone .	it is a relief that the writers did not force a new scene just then it has received .
BiDAF \$279,167,575	bond arrives in st . petersburg and meets his cia contact , jack wade (joe don baker).
RefNet yeah , it made \$ 279,167,575 . pretty good .	i loved the part where bond arrives in st . petersburg and meets his cia contact , jack wade (joe don baker) .

Table 4: Analysis of reference and generation decoding on mixed-short background version.

	Force reference		Force generation	
	SR	MR	SR	MR
BLEU	26.73	30.84	26.00	30.19
ROUGE-1	39.09	44.76	39.86	45.53
ROUGE-2	29.06	34.70	28.34	34.07
ROUGE-L	34.11	39.67	35.03	40.63

RefNet with only reference decoding (*force reference*) and with only generation decoding (*force generation*) in Table 4. We can see that force reference and force generation are comparable if working alone. Specifically, force reference achieves higher BLEU and ROUGE-2 scores, while force generation achieves higher ROUGE-1 and ROUGE-L scores. The contributions of reference and generation decoding are complementary as the combination brings further improvements on all metrics, demonstrating the need for both. It's noted that there are two differences between *force generation* and GTTP. First, we use a matching layer to get the context-aware background representation in Eq. 2, while GTTP only uses basic background representations without such a matching operation. Second, we use the hidden states of the background and context to jointly initialize the decoding states in Eq. 14, while GTTP only uses the single representation of background to initialize it.

6.2 Switcher loss

To verify the effectiveness of the switcher loss $\mathcal{L}_s(\theta)$ in Eq. 17, we compare RefNet with and without training switcher loss, as shown in Table 5. We find that the overall performance in-

Table 5: Analysis of switcher loss on mixed-short background version.

	Without SL		With SL	
	SR	MR	SR	MR
F1	36.13	42.42	40.49	47.25
BLEU	27.96	31.63	29.38	34.83
ROUGE-1	41.00	46.67	41.33	47.00
ROUGE-2	30.15	35.92	31.08	36.50
ROUGE-L	35.81	41.36	36.17	41.72

creases in terms of all metrics with switcher loss, surprisingly, especially on F1. It means that the switcher loss is an effective component, which better guides the model to choose between *reference decoding* and *generation decoding* at the right time in the right place of a conversation by additional supervision signal. The obvious increase of F1 further shows that at the right time to cite a semantic unit may bring higher accuracy.

6.3 Case study

We select some examples from the test set to illustrate the performance of difference methods, as shown in Table 3. One can see that RefNet can select the right semantic unit from the background or generate fluent tokens at appropriate time and position, resulting in more informative and appropriate responses. For instance, in Example 1, RefNet identifies the right semantic unit "\$279,167,575" within the background, which is combined with "yeah , it made" ahead and followed by a positive emotional phrase "pretty good" to form a more natural and conversational response. The second example indicates that RefNet can locate longer semantic units accurately. In contrast, the responses by BiDAF lack naturalness. The responses by GTTP

are relatively inconsistent and irrelevant. In the first example, GTTP breaks the complete semantic unit “clearly my expectations for this movie were not high” and throws out the part “were not high.” S2SA is not very good at leveraging background effectively. There are also some cases where RefNet does not perform well. For example, we find that similar to GTTP, RefNet occasionally selects short or meaningless semantic units, such as “i” and “it.” This indicates that we could further improve reference decoding by taking more factors (e.g., the length of semantic units) into consideration.

7 Conclusion and Future Work

In this paper, we propose RefNet for the Background Based Conversation (BBCs) task. RefNet incorporates a novel *reference decoding* module to generate more informative responses while retaining the naturalness and fluency of responses. Experiments show that RefNet outperforms state-of-the-art methods by a large margin in terms of both automatic and human evaluations.

A limitation of RefNet is that it needs boundary annotations of semantic units to enable supervised training. In future work, we hope to design a weakly supervised or unsupervised training scheme for RefNet in order to apply it to other datasets and tasks. In addition, we will consider more factors (e.g., the length or frequency of semantic unit) to further improve the reference decoding module of RefNet.

Code

To facilitate reproducibility of the results in this paper, we are sharing the code at <https://github.com/MengChuanResearcher/RefNet>.

References

Dzmitry Bahdanau, KyungHyun Cho, and Yoshua Bengio. 2015. Neural machine translation by jointly learning to align and translate. In *ICLR*.

Hongshen Chen, Xiaorui Liu, Dawei Yin, and Jiliang Tang. 2017. A survey on dialogue systems: Recent advances and new frontiers. *ACM SIGKDD Explorations Newsletter*, 19(2):25–35.

Emily Dinan, Stephen Roller, Kurt Shuster, Angela Fan, Michael Auli, and Jason Weston. 2019. Wizard of wikipedia: Knowledge-powered conversational agents. In *ICLR*.

Marjan Ghazvininejad, Chris Brockett, Ming-Wei Chang, Bill Dolan, Jianfeng Gao, Wen-tau Yih, and Michel Galley. 2018. A knowledge-grounded neural conversation model. In *AAAI*, pages 5110–5117.

Jiatao Gu, Zhengdong Lu, Hang Li, and Victor OK Li. 2016. Incorporating copying mechanism in sequence-to-sequence learning. In *ACL*, pages 1631–1640.

Shizhu He, Cao Liu, Kang Liu, and Jun Zhao. 2017. Generating natural answers by incorporating copying and retrieving mechanisms in sequence-to-sequence learning. In *ACL*, pages 199–208.

Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural Computation*, 9(8):1735–1780.

Shaojie Jiang, Pengjie Ren, Christof Monz, and Maarten de Rijke. 2019. Improving neural response diversity with frequency-aware cross-entropy loss. In *The Web Conference 2019*.

Pei Ke, Jian Guan, Minlie Huang, and Xiaoyan Zhu. 2018. Generating informative responses with controlled sentence function. In *ACL*, pages 1499–1508.

Jiwei Li, Michel Galley, Chris Brockett, Jianfeng Gao, and Bill Dolan. 2016. A diversity-promoting objective function for neural conversation models. In *NAACL*, pages 110–119.

Rongzhong Lian, Min Xie, Fan Wang, Jinhua Peng, and Hua Wu. 2019. Learning to select knowledge for response generation in dialog systems. *arXiv preprint arXiv:1902.04911*.

Chin-Yew Lin. 2004. Rouge: A package for automatic evaluation of summaries. In *WAS*.

Shanshan Liu, Xin Zhang, Sheng Zhang, Hui Wang, and Weiming Zhang. 2019a. Neural machine reading comprehension: Methods and trends. *arXiv preprint arXiv:1907.01118*.

Shuman Liu, Hongshen Chen, Zhaochun Ren, Yang Feng, Qun Liu, and Dawei Yin. 2018. Knowledge diffusion for neural dialogue generation. In *ACL*, pages 1489–1498.

Zhibin Liu, Zheng-Yu Niu, Hua Wu, and Haifeng Wang. 2019b. Knowledge aware conversation generation with reasoning on augmented graph. *arXiv preprint arXiv:1903.10245*.

Ryan Lowe, Nissan Pow, Iulian V Serban, and Joelle Pineau. 2015. The ubuntu dialogue corpus: A large dataset for research in unstructured multi-turn dialogue systems. In *SIGDIAL*, page 285.

Nikita Moghe, Siddhartha Arora, Suman Banerjee, and Mitesh M Khapra. 2018. Towards exploiting background knowledge for building conversation systems. In *EMNLP*, pages 2322–2332.

- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *ACL*, pages 311–318.
- Prasanna Parthasarathi and Joelle Pineau. 2018. Extending neural generative conversational model using external knowledge sources. In *EMNLP*, pages 690–695.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100,000+ questions for machine comprehension of text. In *EMNLP*, pages 2383–2392.
- Mike Schuster and Kuldip K Paliwal. 1997. Bidirectional recurrent neural networks. *IEEE Transactions on Signal Processing*, 45(11):2673–2681.
- Abigail See, Peter J Liu, and Christopher D Manning. 2017. Get to the point: Summarization with pointer-generator networks. In *ACL*, pages 1073–1083.
- Minjoon Seo, Aniruddha Kembhavi, Ali Farhadi, and Hannaneh Hajishirzi. 2016. Bidirectional attention flow for machine comprehension. In *ICLR*.
- Iulian Vlad Serban, Alessandro Sordoni, Yoshua Bengio, Aaron C Courville, and Joelle Pineau. 2016. Building end-to-end dialogue systems using generative hierarchical neural network models. In *AAAI*, pages 3776–3784.
- Iulian Vlad Serban, Alessandro Sordoni, Ryan Lowe, Laurent Charlin, Joelle Pineau, Aaron C Courville, and Yoshua Bengio. 2017. A hierarchical latent variable encoder-decoder model for generating dialogues. In *AAAI*, pages 3295–3301.
- Lifeng Shang, Zhengdong Lu, and Hang Li. 2015. Neural responding machine for short-text conversation. In *ACL*, pages 1577–1586.
- Alessandro Sordoni, Michel Galley, Michael Auli, Chris Brockett, Yangfeng Ji, Margaret Mitchell, Jian-Yun Nie, Jianfeng Gao, and Bill Dolan. 2015. A neural network approach to context-sensitive generation of conversational responses. In *ACL*, pages 196–205.
- Ilya Sutskever, Oriol Vinyals, and Quoc V Le. 2014. Sequence to sequence learning with neural networks. In *NeurIPS*, pages 3104–3112.
- Oriol Vinyals, Meire Fortunato, and Navdeep Jaitly. 2015. Pointer networks. In *NIPS*, pages 2692–2700.
- Oriol Vinyals and Quoc Le. 2015. A neural conversational model. In *ICML Deep Learning Workshop*.
- Pavlos Vougiouklis, Jonathon Hare, and Elena Simperl. 2016. A neural network approach for knowledge-driven response generation. In *COLING*, pages 3370–3380.
- Shuohang Wang and Jing Jiang. 2017. Machine comprehension using match- lstm and answer pointer. In *ICLR*.
- Wei Wang, Ming Yan, and Chen Wu. 2018. Multi-granularity hierarchical attention fusion networks for reading comprehension and question answering. In *ACL*, pages 1705–1714.
- Wenhui Wang, Nan Yang, Furu Wei, Baobao Chang, and Ming Zhou. 2017. Gated self-matching networks for reading comprehension and question answering. In *ACL*, pages 189–198.
- Chen Xing, Wei Wu, Yu Wu, Jie Liu, Yalou Huang, Ming Zhou, and Wei-Ying Ma. 2017. Topic aware neural response generation. In *AAAI*, pages 3351–3357.
- Caiming Xiong, Victor Zhong, and Richard Socher. 2017. Dynamic coattention networks for question answering. In *ICLR*.
- Ruqing Zhang, Jiafeng Guo, Yixing Fan, Yanyan Lan, Jun Xu, and Xueqi Cheng. 2018a. Learning to control the specificity in neural response generation. In *ACL*, pages 1108–1117.
- Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. 2018b. Personalizing dialogue agents: I have a dog, do you have pets too? In *ACL*, pages 2204–2213.
- Yizhe Zhang, Michel Galley, Jianfeng Gao, Zhe Gan, Xiujun Li, Chris Brockett, and Bill Dolan. 2018c. Generating informative and diverse conversational responses via adversarial information maximization. In *NeurIPS*, pages 1810–1820.
- Tiancheng Zhao, Ran Zhao, and Maxine Eskenazi. 2017. Learning discourse-level diversity for neural dialog models using conditional variational autoencoders. In *ACL*, pages 654–664.
- Hao Zhou, Tom Young, Minlie Huang, Haizhou Zhao, Jingfang Xu, and Xiaoyan Zhu. 2018a. Commonsense knowledge aware conversation generation with graph attention. In *IJCAI*, pages 4623–4629.
- Kangyan Zhou, Shrimai Prabhumoye, and Alan W Black. 2018b. A dataset for document grounded conversations. In *EMNLP*, pages 708–713.
- Wenya Zhu, Kaixiang Mo, Yu Zhang, Zhangbin Zhu, Xuezheng Peng, and Qiang Yang. 2017. Flexible end-to-end dialogue system for knowledge grounded conversation. *arXiv preprint arXiv:1709.04264*.